


ACCESSORIES

SHELVING

19" FIXED LITE SHELVES SERIES DP-PT

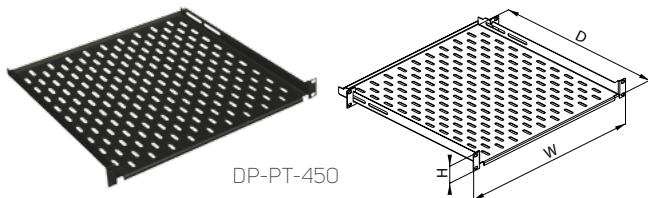


- 1.5 mm sheet steel
- Supporting brackets included
- Color: powder-coated RAL 9005
- Load rating max. 20 kg balanced load; maximum load rating decreased to 25% when mounted on front pair of vertical extrusions only (shelf depth 150, 250, and 350 mm)
- Longer supporting bracket DP-PO-PD available for use
- Package includes: 1x shelf, 2x rear brackets

Code	H (in U)	W	D (mm)	Min-max dist. ¹	Max. dist. ²	Package
DP-PT-150	1	19"	150	75-121	370	1 pc
DP-PT-250	1	19"	250	125-221	470	1 pc
DP-PT-350	1	19"	350	175-321	570	1 pc
DP-PT-450	1	19"	450	225-421	670	1 pc
DP-PT-550	1	19"	550	275-521	770	1 pc
DP-PT-650	1	19"	650	325-621	870	1 pc
DP-PT-750	1	19"	750	375-721	970	1 pc
DP-PT-850	1	19"	850	425-821	1070	1 pc

¹ Between standard front and rear brackets (in mm)

² Between front and rear brackets – with DP-PO-PD (in mm)

19" FIXED SHELVES SERIES DP-PO

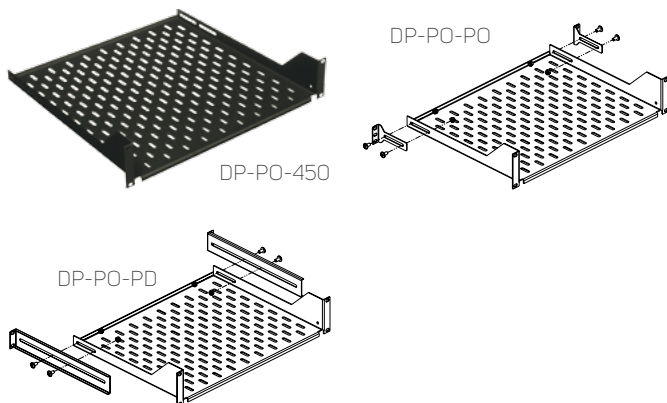

- 2 mm sheet steel
- Support brackets optional
- Color: powder-coated RAL 9005
- Load rating max. 60 kg balanced load (when supporting brackets used – ordered separately); load rating decreased to 25% when mounted on front pair of vertical extrusions only – shelf depth 150, 250 and 350 mm
- Package includes:
 - DP-PO-xxx: 1x shelf

Code	H (in U)	W	D (mm)	Min-max dist. ¹	Max. dist. ²	Package
DP-PO-150	1	19"	150	75-180	385	1 pc
DP-PO-250	1	19"	250	125-265	470	1 pc
DP-PO-350	2	19"	350	230-380	585	1 pc
DP-PO-450	2	19"	450	260-480	685	1 pc
DP-PO-550	2	19"	550	360-580	785	1 pc
DP-PO-650	2	19"	650	460-680	885	1 pc
DP-PO-750	2	19"	750	560-780	985	1 pc
DP-PO-850	2	19"	850	660-880	1085	1 pc

¹ Between standard front and rear brackets (in mm)


² Between front and rear brackets – with DP-PO-PD (in mm)

SUPPORTING BRACKETS

Code	Type	Packing	Length (mm)	H (in U)
DP-PO-PO	Standard	1 pair	88	1
DP-PO-PD*	Extended	1 pair	298	1

* Compatible with DP-PO-xxx, DP-PT-xxx

19" FIXED HIGH-LOAD SHELVES SERIES DP-PZ

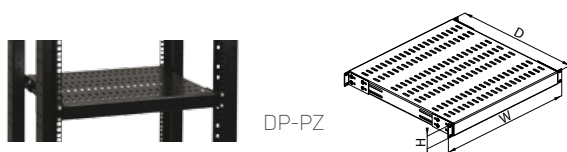


- 2 mm sheet steel, reinforced with metal bars
- Four supporting brackets (for mounting on vertical extrusions) included
- Color: powder-coated RAL 9005
- Load rating max. 100 kg balanced load
- Package includes: 1x shelf, 4x brackets, 16x screws M6, 16x nuts M6

Code	H (in U)	W	D (mm)	Min-max distance ¹	Package
DP-PZ-450	1	19"	450	113-463	1 pc
DP-PZ-550	1	19"	550	213-563	1 pc
DP-PZ-650	1	19"	650	313-663	1 pc
DP-PZ-750	1	19"	750	413-763	1 pc
DP-PZ-850	1	19"	850	513-863	1 pc

¹ Between standard front and rear brackets (in mm)

19" PULL-OUT SHELVES SERIES DP-PO-V

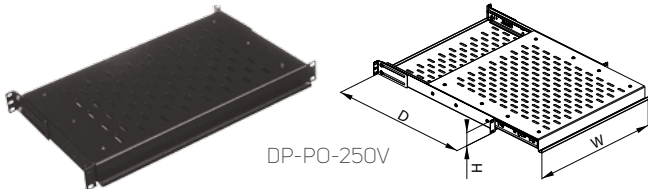


DP-PO-250V

- 1.5 mm sheet steel
- Height: 1U
- Equipped with one pair of side telescopic rails
- Supporting brackets included
- Color: powder-coated RAL 9005
- Load rating max. 25 kg balanced load; maximum load rating decreased to 25% when mounted on front pair of vertical extrusions only (shelf depth: 250 and 350 mm)
- Package includes: 1x shelf, 2x rear brackets, 4x screws M5

Code	H (in U)	W	D (mm)	Min-max dist. ¹	Drawout part max.	Package
DP-PO-250V	1	19"	271	155-370	160 mm	1 pc
DP-PO-350V	1	19"	371	255-470	260 mm	1 pc
DP-PO-450V	1	19"	471	355-570	325 mm	1 pc
DP-PO-550V	1	19"	571	455-670	410 mm	1 pc
DP-PO-650V	1	19"	671	555-770	485 mm	1 pc
DP-PO-750V	1	19"	771	655-870	520 mm	1 pc

¹ Between standard front and rear brackets (in mm)

19" PULL-OUT HIGH LOAD SHELVES SERIES DP-PZ-V

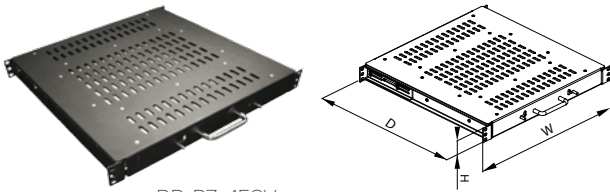


DP-PZ-450V

- 2 mm and 2.5 mm sheet steel
- Height: 1U
- Max. pull-out 450 mm
- Color: powder-coated RAL 9005
- Load rating max. 80 kg balanced load
- Package includes: 1x shelf


Code	H (in U)	W	D (mm)	Min-max distance ¹	Package
DP-PZ-450V	1	19"	471	296-507	1 pc
DP-PZ-550V	1	19"	571	406-607	1 pc

¹ Between standard front and rear brackets (in mm)


SUPPORTING RAILS



DP-DU-75S-800



DP-DU



DP-DU-75S-600

H - 88 MM (2U)
W - 80 MM

- 2 mm sheet steel
- Mountable on vertical extrusion side holes (with DP-MO-01 mountain kit, not included)
- Color: powder-coated RAL 9005
- Space between rails provides effective cooling of active devices
- Load rating max. 50 kg balanced load
- Package includes:
 - DP-DU-xxxx: 2x supporting rails
 - DP-DU-S75: 2x supporting rails, 4x brackets for 800 mm racks, 36x screws M5, 16x floating nuts M5
- Compatible with L-Type extrusions; other information upon request


Rack	Max. DP-DU
RDF 80/80	700
RDF 80/100	900
RSF 60/80	700
RSF 60/100	900
RSF 80/80	700
RSF 80/100	900
Rx7 60/60	500
Rx7 60/80	700
Rx7 60/100	900
Rx7 80/80	700
Rx7 80/100	900

Replace x with i or M

SUPPORTING RAILS			
Code	Distance between front and rear vertical L-type extrusions (mm)	Depth (mm)	Package
DP-DU-300	296	242	1 pair
DP-DU-400	396	342	1 pair
DP-DU-500	496	442	1 pair
DP-DU-600	596	542	1 pair
DP-DU-700	696	642	1 pair
DP-DU-800	796	742	1 pair
DP-DU-900	896	842	1 pair
DP-DU-1000	996	942	1 pair
DP-DU-S75 *	740	692	1 pair

* Load rating of 100 kg for 600 and 800 mm width


19" PULL-OUT DRAWER DP-DD

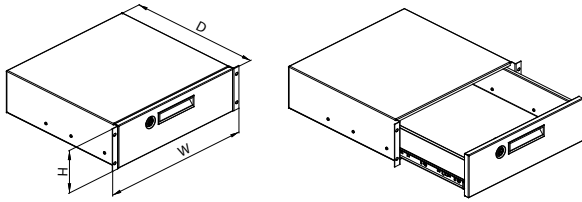

- 1.25 and 1.5 mm sheet steel
- Height: 3U
- Max. pull-out distance 280 mm
- Color: powder-coated RAL 9005
- Load rating max. 10 kg balanced load
- Package includes: 1x drawer

Code	H (in U)	W	D (mm)	Package
DP-DD-03	3	19"	430	1 pc


19" PULL-OUT KEYBOARD HOLDER SERIES DP-PV

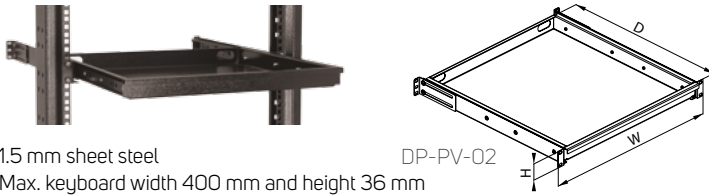

- 1.5 mm sheet steel
- Max. keyboard width 400 mm and height 36 mm
- Shelf depth: 480 mm
- Max. pull-out distance 330 mm
- Color: powder-coated RAL 9005
- Supporting brackets included
- Supporting brackets DP-PV-PD for installation into 800 and 1000 mm deep racks (optional)
- Package includes: 1x keyboard holder, 2x rear brackets, 4x screws M5, 1x self-adhesive velcro tape

Code	H (in U)	W	D (mm)	Package
DP-PV-02	1	19"	480	1 pc


19" FOLDING KEYBOARD HOLDER SERIES DP-PV

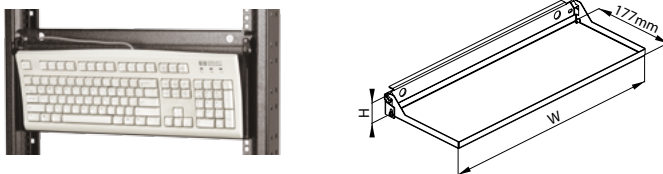

- Enables keyboard placement in front of sliding vertical extrusions
- Max. keyboard size 480x175 mm
- Color: powder-coated RAL 9005
- Height: 1U
- Fix keyboard to shelf using self-adhesive velcro – 8 pcs of size 12x25 mm (included)
- Package includes: 1x keyboard holder, 1x self-adhesive velcro tape

Code	H (in U)	W	Package
DP-PV-01	1	19"	1 pc

21" ADAPTORS

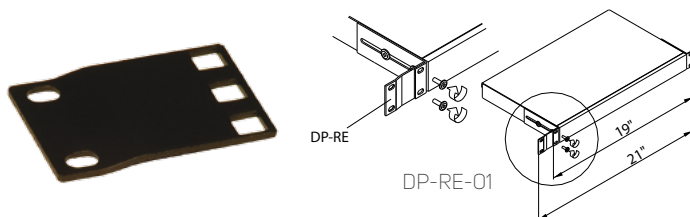

- Allows for use of 19" equipment in 21" rack
- Color: powder-coated RAL 9005
- Package includes: 1x adaptor

Code	H (in U)	Package
DP-RE-01	1	1 pc
DP-RE-02	2	1 pc
DP-RE-03	3	1 pc

www.conteg.com



CONTEG, spol. s r.o.

Headquarters:

Na Vítězské pláni 1719/4
140 00 Prague 4
Czech Republic
Tel.: +420 261 219 182
conteg@conteg.com
www.conteg.com

Production plant:

K Silu 2179
393 01 Pelhřimov
Czech Republic
Tel.: +420 565 300 300

Local Branches/Offices:

Austria/Germany/Switzerland:	+420 261 219 182
Benelux:	+31 76 5420 709
Southeastern Europe:	+49 172 8484 346
Finland:	+358 50 414 1257
France/Italy/Maghreb:	+33 1 60 04 55 90
Middle East:	+971 55 508 3241
Russia/CIS:	+7 495 967 3840
Saudi Arabia:	+966 54 000 2341

CONTEG